

(12) UK Patent Application (19) GB (11) 2 207 096⁽¹³⁾ A
 (43) Application published 25 Jan 1989

(21) Application No 8716842

(22) Date of filing 17 Jul 1987

(71) Applicant
 Barry John Paton
 95 Hawes Lane, West Wickham, Kent

(72) Inventor
 Barry John Paton

(74) Agent and/or Address for Service
 Barry John Paton
 95 Hawes Lane, West Wickham, Kent

(51) INT CL⁴
 B62D 31/00 B60P 3/42 B62D 65/00

(52) Domestic classification (Edition J):
 B7B 287 28Y 349 HH
 B7J 108

(56) Documents cited
 GB A 2178701 GB A 2164298 GB 1563399
 EP 0004612

(58) Field of search
 B7B
 Selected US specifications from IPC sub-classes
 B62D B60P

(54) Road vehicles with demountable bodies

(57) A vehicle e.g. 4 seater saloon, has a body 12 which is detachable from the chassis 10 so that a different body can be substituted to change the load carrying function of the vehicle or, in the event of mechanical or electrical failure, a second chassis can be substituted for the first so that the load carrying function of the body is not interrupted. The steering column is detachably mounted to facilitate exchange of bodies.

FIG. 2


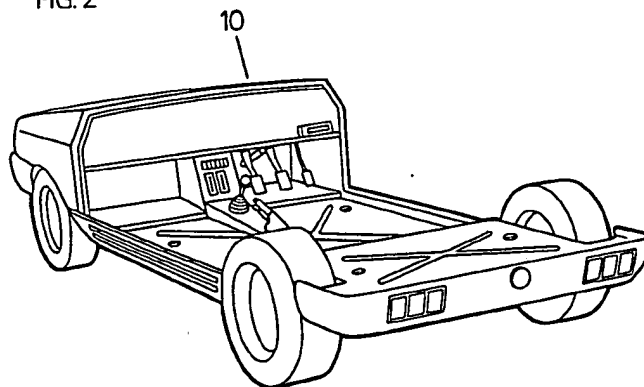


FIG. 4

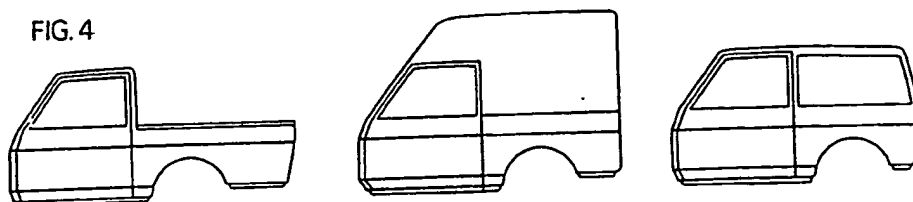

2207096

FIG.1

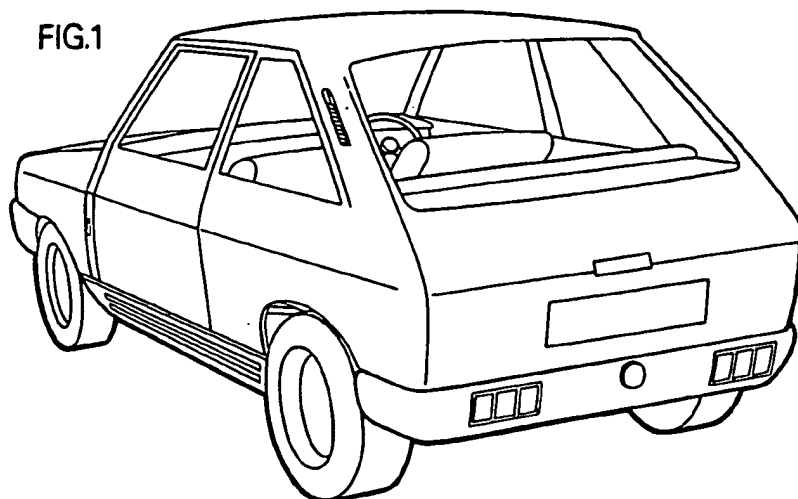


FIG.2

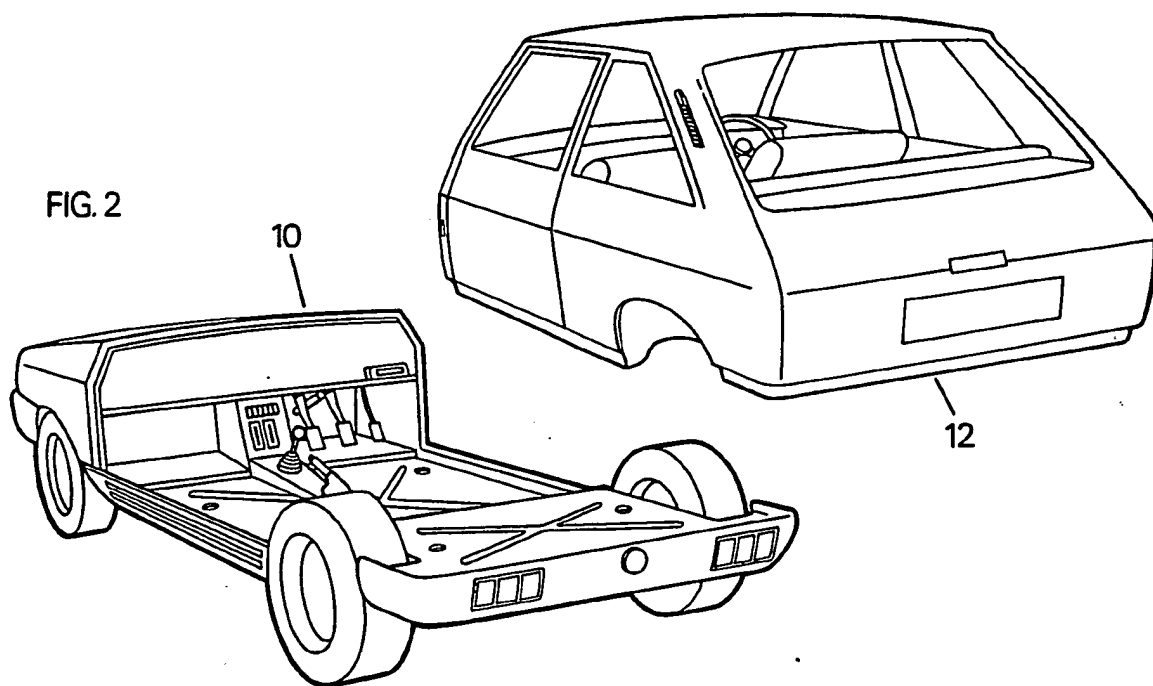


FIG.3


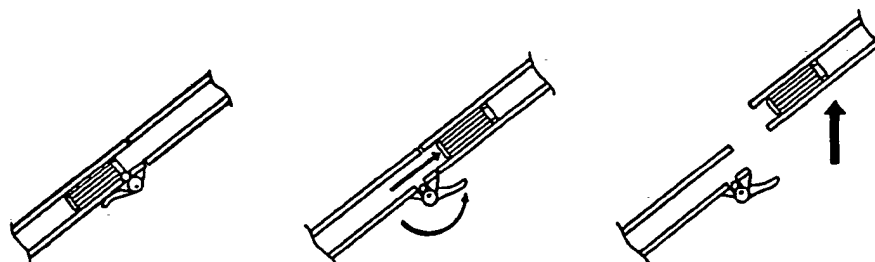


FIG.4

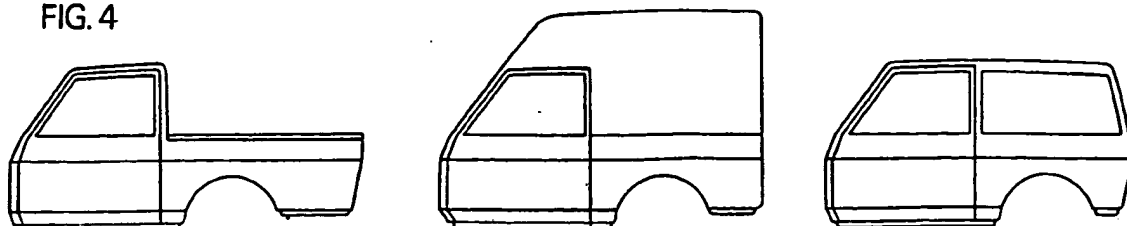

- 1 -

COMPOSITE CAR SYSTEM

This invention relates to a car with a detachable body.

Cars are well known motor vehicles which comprise a wheeled chassis with an integral body or a wheeled chassis upon which a body is permanently attached. There are many types of motor vehicles available to suit various requirements ie, two seater, four seater, pick-ups, vans. etc.

The load carrying part of these vehicles is permanently attached to the mechanical parts. In the event of mechanical or electrical failure the load carrying part of the vehicle must of necessity remain idle and cannot be used.

According to the present invention there is provided a detachable bodied motor vehicle comprising a wheeled chassis incorporating the mechanical and electrical functions, a detachable body, means for releasably securing the body on the chassis provision for a retractable steering column and suitable provision on the body to allow it to be lifted on and off the chassis.

A specific embodiment of the invention will now be described by way of example with reference to the accompanying drawing in which:-

Figure 1 shows in perspective the motor vehicle with the body in position on the chassis.

Figure 2 illustrates the separation of the body from the chassis.

Figure 3 shows some alternative bodies.

Figure 4 illustrates the retractable steering column.

Referring to the drawing the motor vehicle comprises a wheeled chassis 10, incorporating the mechanical and electrical functions and a body 12, in the form of a small 4/5 seat saloon car (as shown in Fig 1) or another type of body (as shown in Fig 4) which is releasably secured to the chassis by, for example, a mechanical locking device or solenoid operated locks or similar means (not shown). On the body suitable means of attachment for lifting the body on and off the chassis.

In order to remove the body from the chassis the means of securing the body are released, the steering column is retracted (as shown in Fig 3), the body is then lifted by a suitable device and the chassis is then withdrawn from underneath the body as illustrated in Fig 2.

In the event of mechanical or electrical failure a second chassis can now be substituted for the first in order to regain use of the load carrying function of the body. If required the function of the motor vehicle can be changed by substituting the first body with a second body of a different load carrying capacity (as shown in Fig 4).

To remount a body on the chassis the steps described above are carried out in the reverse sequence.

CLAIMS

- 1.A detachable bodied motor vehicle comprising a wheeled chassis incorporating the mechanical and electrical functions, a body in various forms with suitable mountings on the body to allow for lifting on and off the chassis.
- 2.A detachable bodied motor vehicle as claimed in Claim 1. wherein the steering column is retractable to, allow detachment of body.
- 3.A detachable bodied motor vehicle as claimed in Claim 1 or Claim 2 wherein catchment means are provided on the chassis for securing the body.
- 4.A detachable bodied motor vehicle substantially as described herein with reference to Figs 1-4 of the accompanying drawing.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.